

### Flexible VoIP solution for small businesses


- Exceptional HD sound with wideband technology
- Up to 4 simultaneous external calls
- Up to 2 simultaneous calls per handset
- Up to 5 DECT cordless handsets
- Up to 5 VoIP accounts
- 1.8" color display with intuitive user interface
- 5~10 hours talk time, 100 hours standby time
- Integrated PoE (Class 1)
- Desktop or wall mountable



HD Voice



Up to 5 users



4 simultaneous calls



Yealink W52P is a SIP Cordless Phone System designed for small business and SoHo who are looking for immediate cost saving but scalable SIP-based mobile communications system.


Combining the benefits of wireless communication with rich business features of Voice over IP telephony, User can benefit from freedom of movement, lifelike voice communications, multi-tasking convenience, professional features like intercom, transfer, call forward, 3-way conferencing, PoE, etc.

This system works with widely-known Broadsoft, Asterisk, 3CX and supports quick and easy configuration.

- Up to 5 DECT Cordless Handsets  
Per base depending on your needs
- DECT radio coverage up to 50m indoors and 300m outdoors
- Energy-saving ECO features

#### DECT technology:

CAT-iq2.0 focuses on high quality Audio VoIP (wideband), as well as low bit - rate data applications, fully backward compatible to DECT GAP

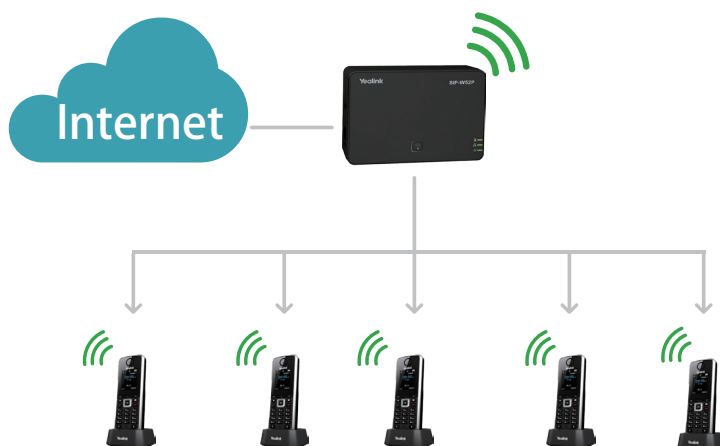

### Phone Features

- Up to 4 simultaneous calls
- Up to 2 simultaneous calls per handset
- Up to 5 handsets, up to 5 VoIP accounts
- Handset select for receiving call
- Handset and Number select for making call
- Paging, intercom, auto answer
- Call hold, call transfer, 3-way conferencing
- Switching between calls
- Call waiting, mute, DND
- Caller ID display, redial
- Anonymous call, anonymous call rejection
- Call forward (always/busy/no answer)
- Speed dial, voicemail, silence
- Message Waiting Indication (MWI)
- Local phonebook for up to 500 entries (store in the base)
- Remote phonebook
- Phonebook search/import/export
- Call history (outgoing/missed/accepted)
- Direct IP call without SIP proxy
- Reset to factory, reboot
- Keypad lock, emergency call
- Dial Plan, music on hold
- Broadsoft directory, broadSoft Call Log
- Broadworks feature key synchronization
- Shared Call Appearance (SCA)

### Personalization

- 9 ringer melodies
- Screen saver, two kind of color schemes
- Multi-language support

### Management

- Auto-provision via FTP/TFTP/HTTP/HTTPS
- Auto-provision with PnP
- Handset upgrade:  
OTA (Over-The-Air)/USB port
- Configuration:  
browser/phone/auto-provision
- Trace package and system log export

### Voice and Codecs Features

- Full-duplex speakerphone
- Receiver volume control: 5 steps
- Ringer volume control: 5 steps+off
- Multiple advisory tones
- Acoustic warning for low battery status
- DTMF
- Wideband codec: G.722
- Narrowband codec:  
G.711μ/A, G.723, G.726, G.729, iLBC
- VAD, CNG, AEC, PLC, AJB
- Support VQ-RTCPXR (RFC6035)

### Network Features

- SIP v1 (RFC2543), v2 (RFC3261)
- SNTP/NTP
- VLAN (802.1Q and 802.1P)
- 802.1x, LLDP, PPPoE
- STUN Client (NAT Traversal)
- UDP, TCP
- IP assignment: static/DHCP

### Security

- Open VPN
- Transport Layer Security (TLS)
- HTTPS (server/client)
- SRTP (RFC3711)
- Digest authentication using MD5
- Secure configuration file via AES encryption
- Admin/Var/User 3-level configuration mode

### DECT

- Frequency bands:  
1880 - 1900 MHz (Europe),  
1920 - 1930 MHz (US)
- DECT Standards: CAT-iq2.0

### Connectors

- 1 x RJ45 10/100M Ethernet port
- Power over Ethernet (IEEE 802.3af)
- Headset jack (2.5 mm)
- A mini USB Port

### Physical Features

- Indoor Range: 20m~50m  
(The ideal distance is 50m)
- Outdoor Range: 300m (In ideal conditions)
- Standby Time: 100h (In ideal conditions)
- Talk Time: 5~10h  
(The ideal talk time is 10h)
- 1.8" 128x160 pixels color display
- Desktop or wall mountable
- LCD backlit, key backlit
- Energy-saving ECO mode/ECO Mode+
- 12 key numerical keypad, 5 navigation keys  
2 softkeys, 6 function keys, 6 shortcut keys
- 3 LEDs on Base:  
1 x power, 1 x Network, 1 x Call
- Base station: DC 5V/600mA Output
- Charger: DC 5V/600mA Output
- Phone size: 144mm x 50mm x 24mm
- Base station size:  
153.5mm x 108.5mm x 45mm
- Operating humidity: 10 ~ 95%
- Operating temperature: -10 ~ +50°C

### Package Features

- 1 x handset, 1 x base station, 1 x belt clip  
2 x rechargeable battery,  
1 x charger cradle, 2 x power adapter  
1 x ethernet cable, 2 x guide, 1 x CD-ROM
- Qty/CNT: 10pcs
- Giftbox size: 214mm\*200mm\*101mm
- Carton meas: 529mm\*410mm\*223mm
- N.W: 7.4 kg
- G.W: 8.1 kg

### Special Features

- Increase range with up to 5 repeaters

### Certifications

